




Impact Dot matrix Printer

XP-7645III




- Freshness outside design, easy operation
- GB18030 simplified Chinese, traditional Chinese, buyers languages
- Black mark orientation, support invoice printing function
- Various interfaces, multiple choices
- 100MB Ethernet interface connection transfer data efficiently
- Avoid order missing

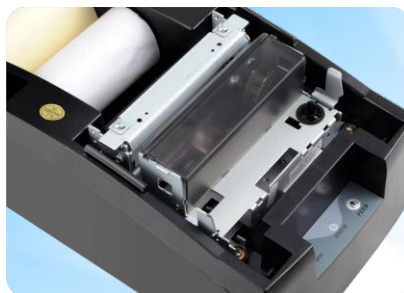

XP-7645III

Impact Dot matrix Printer



Model	XP-7645III
Printing method	9-Pin serial impact dot-matrix printing
Printing speed	4.5 line/sec
Printing width	75.5 ± 0.5mm
Paper diameter	80mm
Paper thickness	0.06~0.08mm
Column capacity	400 dots/line
Line space	4.23mm(changeable using commands)
Character size	ANK, Font A: 9×9 dots Font B: 7×9 dots Simplified/traditional Chinese: 16x16 dots
Black mark detection	Support
Code page	PC347(Standard Europe) / Katakana、PC850 (Multilingual) / PC860(Portuguese) /PC863(Canadian-French) /PC865(Nordic) / West Europe/Greek/Hebrew/East Europe/Iran/WPC1252/PC866(Cyrillic#2) / PC852(Latin2) /PC858/IranII/Latvian/Arabic/PT151(1251) /024_PC747/ 025_[WPC1257]/027_[Vietnam]/028_PC864/029_PC1001/030_[Uigur]/ 031_[Hebrew]/032_WPC1255[Israel]/255_[Thai]
NV FLASH	64K Bytes
Input buffer	32K Bytes
Power supply	DC 24V = 2.5A
Cash drawer control	DC 24V = 1A
Interface	USB / Parallel / Serial / Lan
Reliability	Printing head life: 10 Million Lines
Working environment	Temperature (0~45°C), humidity(10~80%)
Storage environment	Temperature (-10~60°C), humidity(10~90%)
Drivers	Win XP/Win Vista/Win 7/Win 8/Win 10/Linux
Command	Compatible with ESC/POS
Gross weight	2.2 kg
Dimension	247×156×143mm (D×W×H)



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.poskeytech.com
Email: overseas@xprinter.net

