




Thermal Barcode Printer


XP-303B

- Support IAP online firmware update
- Support energy control to prevent printhead overheat
- Auto calibration mode creates more accurate printing
- With dual mode of bluetooth, transmission distance can reach 10m

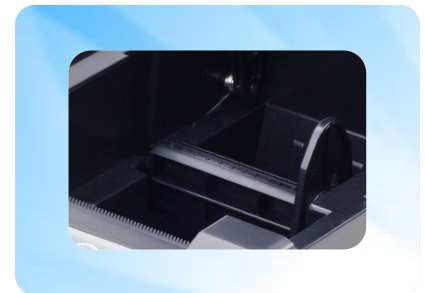

XP-303B

Thermal Barcode Printer



MODEL	XP-303B
Printing method	Direct thermal
Resolution	203dpi (8dots/mm)
Paper width	20 mm ~ 80 mm
Paper thickness	0.06~0.19mm
Printing speed	Min: 50.8mm/s Max: 152mm/s
Roll inner diameter	25.4mm(1 in), 38.1mm(1.5 in)
Max. Media Diameter	90mm
Bar Codes	CODE128 / 128M / EAN128 / CODE39 / 39C / 39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / AN8 / EAN8+2 / EAN8+5 / 25 / 25C / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPC-E / UPCE+2 / UPC-E+5 / CPOST / MSI / MSIC / PLESSEY / ITF14 / EAN14 PDF417 / QR CODE
Label length	10mm - 100mm(0.34 in - 3.9 in)
Paper off type	Tear off
Commands	TSPL(Label mode) ESC/POS(Receipt mode)
Print head temperature sensor	Thermal sensitive resistance
Internal font	FONT 0 to FONT 8; Commonly used in single-byte fonts
Enlargement & rotation	1to10 times enlargement in both directions; 0°, 90°, 180°, 270° rotation
Gross weight	0.94 kg
Dimension	212(D) x 140(W) x 144(H)mm
Work enviroment	5~45°C, 20~80%RH
Storage enviroment	-40~55°C, ≤93%RH(40°C)
Drivers	Win XP/Win 7/Win 8/Win 10/Android/IOS
Input	24VDC, 2.5A
Paper exists detection	Photoelectric sensor
Interface	USB / USB+Bluetooth(Optional)
Print head life	100 KM
Image	Monochromatic PCX, BMP image files can be load to FLASH, DRAM



Scan QR code to checkout Xprinter website for more update information.
 Phone: (+86 756) 3895 852
[Http://www.xprintertech.com](http://www.xprintertech.com)
 Email: overseas@xprinter.net

