


Xprinter®

Thermal Barcode Printer


XP-303B

- Support IAP online firmware update
- Support energy control to prevent printhead overheat
- Auto calibration mode creates more accurate printing
- With dual mode of bluetooth, transmission distance can reach 10m

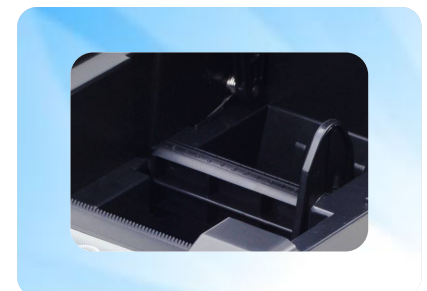

XP-303B

Thermal Barcode Printer



MODEL	XP-303B
Printing method	Direct thermal
Resolution	203dpi (8dots/mm)
Paper width	20 mm ~ 80 mm
Paper thickness	0.06~0.19mm
Printing speed	Min: 50.8mm/s Max: 152mm/s
Roll inner diameter	25.4mm(1 in), 38.1mm(1.5 in)
Max. Media Diameter	90mm
Bar Codes	CODE128 / 128M / EAN128 / CODE39 / 39C / 39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / AN8 / EAN8+2 / EAN8+5 / 25 / 25C / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPC-E / UPCE+2 / UPC-E+5 / CPOST / MSI / MSIC / PLESSEY / ITF14 / EAN14 PDF417 / QR CODE
Label length	10mm - 100mm(0.34 in - 3.9 in)
Paper off type	Tear off
Commands	TSPL(Label mode) ESC/POS(Receipt mode)
Print head temperature sensor	Thermal sensitive resistance
Internal font	FONT 0 to FONT 8; Commonly used in single-byte fonts
Enlargement & rotation	1to10 times enlargement in both directions; 0°, 90°, 180°, 270° rotation
Gross weight	0.94 kg
Dimension	212(D) x 140(W) x 144(H)mm
Work enviroment	5~45°C, 20~80%RH
Storage enviroment	-40~55°C, ≤93%RH(40°C)
Drivers	Win XP/Win 7/Win 8/Win 10/Android/IOS
Input	24VDC, 2.5A
Paper exists detection	Photoelectric sensor
Interface	USB
Image	Monochromatic PCX, BMP image files can be load to FLASH, DRAM



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
[Http://www.xprintertech.com](http://www.xprintertech.com)
Email: overseas@xprinter.net

