


Xprinter®

Thermal Transfer / Direct Thermal


XP-TT426B/TT437B

- Equipped dual motor
- Print speed up to 127mm/s
- Ribbon roll capacity 300m,
25.4mm Ribbon Roller (Outer roll ribbon)
- Supporting TSPL-EZ printer language,
Eltron and Zebra commands
- Large visual windows

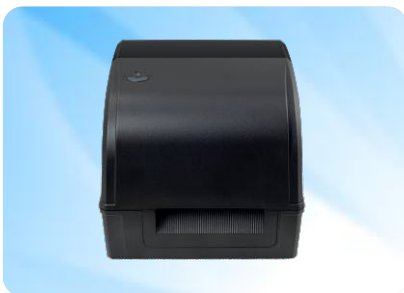

XP-TT426B

Thermal Transfer/ Direct Thermal



Model	XP-TT426B	XP-TT437B
Resolution	203 DPI	300 DPI
Print method	Thermal Transfer / Direct Thermal	
Print speed	127 mm (5") / s Max.	101 mm (4 ") / s Max.
Max.print width	108 mm (4.25")	
Max.print length	1778 mm (70")	889 mm (35")
Media		
Media type	Continuous, gap, black mark, fan-fold and punched hole	
Media width	25.4-118mm (1.0"-4.6")	
Media thickness	0.06~0.254 mm (2.36~10mil)	
Media core diameter	25.4 ~ 76.2 mm (1 " ~ 3 ")	
Label length	10 - 1778 mm(0.39" ~ 70")	10 ~ 889 mm(0.39" ~ 35")
Label roll capacity	127 mm (5") OD (External Diameter)	
Ribbon capacity	Max.300m	
Ribbon width	110 mm	
Ribbon core inner diameter	25.4 mm (1")	
Performance Features		
Processor	32-bit CPU	
Memory	8MB Flash Memory/ 8MB SDRAM/ Flash memory can be expanded Max.4Gb	
Interface	Stardard version: USB Optional:Lan/WIFI/Bluetooth/TF card	
Sensors	① Gap sensor ② Cover opening sensor ③ Black mark sensor ④ Ribbon sensor	
Fonts/Graphics/Symbologies		
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.	
1D barcode	Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST	
2D barcode	PDF-417, Maxicode, DataMatrix, QR code, Aztec	
Rotation	0°、90°、180°、270°	
Emulaion	TSPL、EPL、ZPL、DPL	
Physical Features		
Dimension	299 mm (D) x 235 mm (W) x 198.3 mm (H)	
Weight	2.55 kg	
Reliability		
Print head life	30 km	
Software		
Driver	Windows / Linux / Mac	
SDK	Windows / iOS / Android	
Power supply		
Input	AC 110-240V,1.8A, 50-60Hz	
Output	DC 24V, 2.5A, 60W	
Options		
Factory Options	① Built-in Ethernet server (10/100 Mbps); ② RS-232C (2400-115200 bps) communication interface; ③ Cutter ④ Peeling machine ⑤ Bluetooth module ⑥ WiFi module	
Dealer Options	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder	
Environmental Conditions		
Operation	5 ~ 40°C(41~104°F) , Humidity: 25 ~ 85% non-condensing	
Storage environment	-40 ~ 60°C(-40~140°F) , Humidity:10 ~ 90% non-condensing	



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

