


Xprinter®

Thermal Barcode Printer


XP-303B

- Support IAP online firmware update
- Support energy control to prevent printhead overheat
- Auto calibration mode creates more accurate printing
- With dual mode of bluetooth, transmission distance can reach 10m

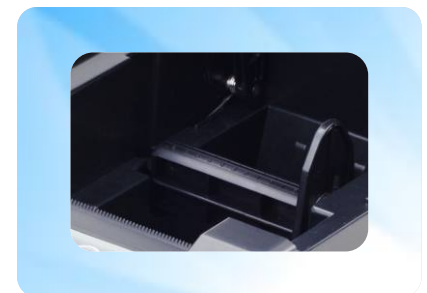

XP-303B

Thermal Barcode Printer



Model	XP-303B	
Mode	Label print mode	Receipt print mode
Printing Features		
Resolution	203 DPI	384 dots/line
Printing method	Direct Thermal	
Max.print speed	50.8 - 152 mm/s Max.	1270 mm/s Max.
Max.print width	76 mm	72 mm/s
Media		
Media type	Thermal stickers paper	Thermal paper
Media width	20~82 mm	80 mm
Media thickness	0.06 ~ 0.08 mm	
Media roll diameter	Max.100 mm	
Performance Features		
NV image memory	4096 Kbytes	
Receipt buffer	4096 Kbytes	
Interfaces	USB/ USB+Bluetooth/ USB+Serial / USB+Serial+Lan	
Sensors	Print head temperature sensor / Print head position sensor / Paper existence sensor	
Drawer port	1 port (Pin 2 for cashdrawer)	
Fonts/Graphics/Symbologies		
Character sizes	Font 0 to Font8	
1D barcode	CODE128 / EAN128 / ITF / CODE39 / CODE39C / CODE39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / EAN8 / EAN8+2 / EAN8+5 / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPCE / UPCE+2 / UPCE+5 / MSI / MSIC / PLESSEY / ITF14 / EAN14	
2D bar code	PDF417、QR CODE	
Emulation	TSPL	ESC/POS
Physical Features		
Dimension	212*140*144 mm(D×W×H)	
Weight	0.94 kg	
Reliability		
Print head life	100 km	
Software		
Driver	Windows	Windows/ Linux/ Mac/ Android
SDK	iOS/ Android/ Windows	
Power supply		
Input	DC 24V/2.5A	
Environmental Conditions		
Operation	0~45 °C Humidity:RH 10 ~ 80%	
Storage environment	-10 ~ 60°C Humidity:10 ~ 90%	



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

