

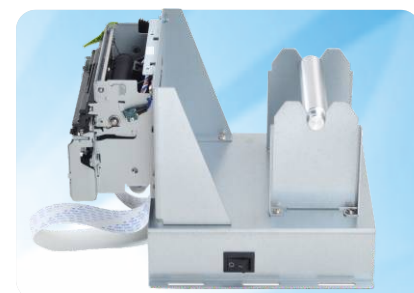
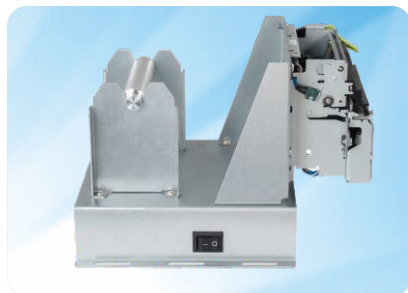


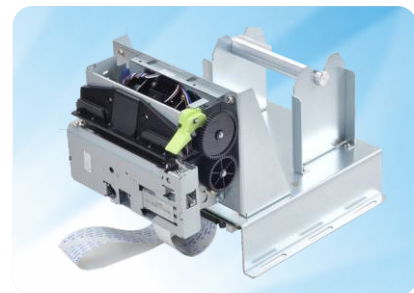

## Kiosk Printer


# XP-TS80

- Support QR CODE Printing
- Support wall mountable and truck cable
- Support overtype function

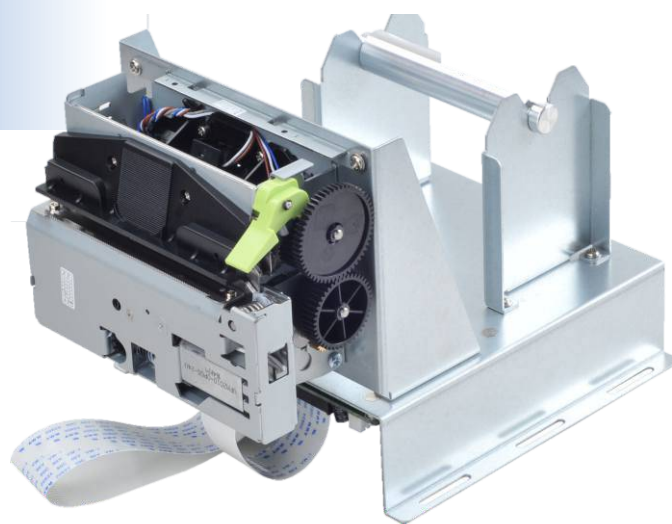

# Xprinter®

## XP-TS80 Panel Printer

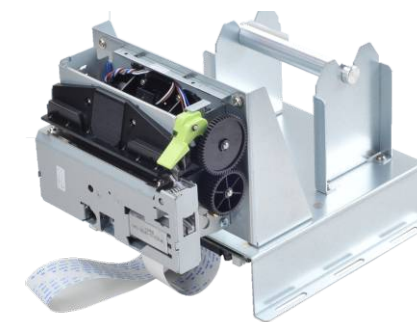

| Model                      | XP-TS80                                                                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Printing method            | Direct thermal                                                                                                                                                                                                                                                         |
| Paper width                | 79.5±0.5mm                                                                                                                                                                                                                                                             |
| Print width                | 72mm                                                                                                                                                                                                                                                                   |
| Column capacity            | 576 dots/line                                                                                                                                                                                                                                                          |
| Print speed                | 200 mm/s Max.                                                                                                                                                                                                                                                          |
| Interface                  | USB+Serial                                                                                                                                                                                                                                                             |
| Line spacing               | 3.75mm                                                                                                                                                                                                                                                                 |
| Character size             | ANK, Font A: 1.5×3.0mm (12×24 dots) Font B: 1.1×2.1mm (9×17 dots)<br>Chinese, traditional Chinese:3.0×3.0mm (24×24 dots)                                                                                                                                               |
| Column number              | Font A - 42 columns or 48 columns/ Font B - 56 columns or 64 columns/<br>Chinese,traditional Chinese - 21 columns or 24 columns                                                                                                                                        |
| Barcode Character          |                                                                                                                                                                                                                                                                        |
| Extension character sheet  | PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 / IranII / Latvian / Arabic / PT151(1251) |
| Barcode types              | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128                                                                                                                                                                                                  |
| 2D Barcode                 | QR CODE                                                                                                                                                                                                                                                                |
| Input buffer               | 4096 Kbytes                                                                                                                                                                                                                                                            |
| NV Flash                   | 256 Kbytes                                                                                                                                                                                                                                                             |
| Power                      |                                                                                                                                                                                                                                                                        |
| Power source               | Output: DC 24V/2.5A                                                                                                                                                                                                                                                    |
| Cash drawer output         | DC 24V/1A                                                                                                                                                                                                                                                              |
| Physical characteristics   |                                                                                                                                                                                                                                                                        |
| Weight                     | 1.8 KG                                                                                                                                                                                                                                                                 |
| Dimensions                 | 202.7 ×158×140 mm (D×W×H)                                                                                                                                                                                                                                              |
| Environmental Requirements |                                                                                                                                                                                                                                                                        |
| Operation environment      | Temperature: 0~45℃ humidity : RH 10 ~ 80%                                                                                                                                                                                                                              |
| Storage environment        | Temperature: -10~60℃ humidity: RH 10~90℃                                                                                                                                                                                                                               |
| Reliability                |                                                                                                                                                                                                                                                                        |
| Cutter life                | 1 million cuts                                                                                                                                                                                                                                                         |
| Printer head life          | 100 KM                                                                                                                                                                                                                                                                 |



Scan QR code to checkout Xprinter website for more update information.  
Phone: (+86 756) 3895 852  
Http://www.xprintertech.com  
Email: overseas@xprinter.net

