


XP-P301G

Mobile Receipt & Label Printer

Xprinter®

XP-P301G

Mobile Receipt & Label Printer



- Support both **receipt printing** and **label printing**



- Support **NFC** function




- Support **QR code** and **PDF417**



- **70mm/s** print speed



- **2550mAh** battery life longer than other products

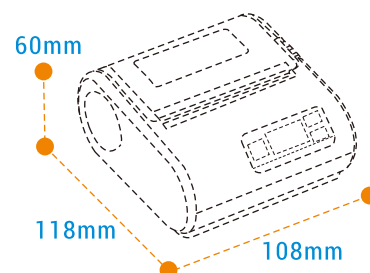

Model	XP-P301G	
Print mode	Label print mode	Receipt print mode
Printing method	Direct Thermal	
Resolution	203 DPI	384 dots/line
Max.print speed	70 mm/s Max.	70 mm/s
Max.print width	20~72 mm	72 mm
Storage	CPU RAM:512K / FLASH:8MB	
Interfaces	USB+Bluetooth	
Print head temperature detection	Thermistor	
Print head position detection	Micro Switch	
Paper detection	Photoelectric sensor	
Media		
Media type	Thermal roll paper, thermal adhesive paper	Thermal paper
Media width	20~80mm	80 mm
Media roll diameter	Max.50 mm	
Paper exit method	Tearing off	
Fonts/Graphics/Symbologies		
Character size	Character set Common single-byte fonts: FONT 0~FONT 8	ASCII Code , FontA:12x24 dot FontB:9x17 dot ,GB18030/BIG5/KSC5601 simplified/traditional, Chinese:24*24 dot
1D bar code	CODE128, EAN128, ITF, CODE25, CODE39, CODE39C, CODE39S, CODE93, EAN13, EAN13+2, EAN13+5, EAN8, EAN8+2, EAN8+5, CODABAR, POSTNET, UPC-A, UPCA+2, UPCA+5, UPCE, UPCE+2, UPCE+5, MSI, MSIC, PLESSEY, ITF14, EAN14	UPC-A/UPC-E/JAN13 (EAN13) / JAN8(EAN8)/CODE39/ITF/CODABAR/ CODE93/CODE128
2D bar code	QR CODE / PDF417	
Physical Features		
Dimension	118*108*60mm	
Weight	0.38 kg	
Operation	-10~55 °C, Humidity: RH 20 ~ 85%	
Storage environment	-40 ~ 55 °C, Humidity: ≤93% RH	
Power Input	DC 5V / 2A	
Battery	DC 7.2V / 2550mAh	
Operating system	WINDOWS/ Android / IOS / Linux	



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

