




Xprinter®

Thermal Barcode Printer

XP-303B




- Support IAP online firmware update
- Support energy control to prevent printhead overheat
- Auto calibration mode creates more accurate printing
- With dual mode of bluetooth, transmission distance can reach 10m

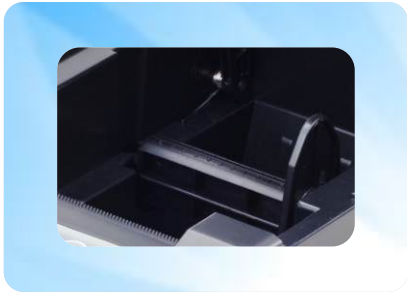

XP-303B

Thermal Barcode Printer



Model		XP-303B			
Mode		Label print mode		Receipt print mode	
Printing Features					
Resolution		203 DPI		384 dots/line	
Printing method		Direct Thermal			
Max.print speed		50.8 - 152 mm/s Max.		127 mm/s Max.	
Max.print width		76 mm		72 mm/s	
Media					
Media type		Thermal stickers paper		Thermal paper	
Media width		20~82 mm		80 mm	
Media thickness		0.06 ~ 0.19 mm		0.06 ~ 0.08 mm	
Media roll diameter		Max.100 mm			
Performance Features					
NV image memory		4096 Kbytes			
Receipt buffer		4096 Kbytes			
Interfaces		USB/ USB+Bluetooth/ USB+Lan / USB+Serial+Lan			
Sensors		Print head temperature sensor / Print head position sensor / Paper existence sensor			
Drawer port		1 port (Pin 2 for cashdrawer)			
Fonts/Graphics/Symbologies					
Character sizes		Font 0 to Font8			
1D barcode		CODE128 / EAN128 / ITF / CODE39 / CODE39C / CODE39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / EAN8 / EAN8+2 / EAN8+5 / CODABAR / POSTNET / UPC-A /UPCA+2 /UPCA+5/ UPCE / UPCE+2 / UPCE+5 / MSI / MSIC / PLESSEY / ITF14 / EAN14			
2D bar code		PDF417、QRCODE			
Emulaion		TSPL		ESC/POS	
Physical Features					
Dimension		212*140*144 mm(D×W×H)			
Weight		0.94 kg			
Reliability					
Print head life		100 km			
Software					
Driver		Windows		Windows/ Linux/ Mac/ Android	
SDK		iOS/ Android/ Windows			
Power supply					
Input		DC 24V/2.5A			
Environmental Conditions					
Operation		0~45 °C Humidity:RH 10 ~ 80%			
Storage environment		-10 ~ 60°C Humidity:10 ~ 90%			



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

