

XP-D481B

Industrial Thermal Label Printer

Xprinter®

XP-D481B

Industrial Label Thermal Printer



- Label printer for industrial machine
- Network interface, flexible operation, large capacity, visual window




- Industrial heat dissipation




- Stable printing, automatic adjustment



- 200mm/s printing speed



- 8MB Flash Memory/ 32MB SDRAM

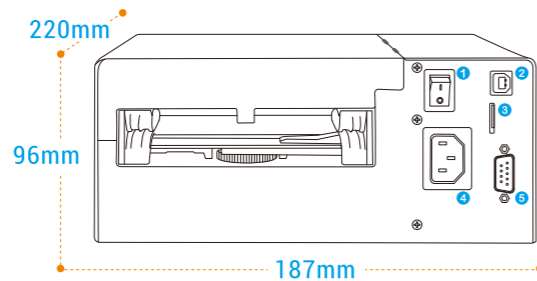

• Interface

- ① Switch ② USB
- ③ TF card
- ④ Power port ⑤ Serial



Model	XP-D481B
Resolution	203 DPI
Print method	Direct Thermal
Max.Print speed	200 mm (8") / s Max.
Max.print width	104mm (4.09")
Max.print length	1778 mm (70")

Media	
Media type	Continuous, Gap, Black mark, Perforated paper
Media width	40 ~ 120 mm (1.57" ~ 4.7")
Media thickness	0.06 ~ 0.18 mm (2.36 ~ 7.1 mil)
Label length	10 ~ 1778 mm(0.39" ~ 70")
Gap height	2mm Min.
Black mark height	2mm Min.
Printout Deviation	Vertical: 1mm Max. Horizontal: 1 mm Max.

Performance Features	
Processor	32-bit CPU
Memory	8MB Flash Memory/ 32MB SDRAM/ Flash memory can be expanded Max.4Gb
Interface	USB + Serial (Optional: WIFI / Bluetooth / TF card)
Sensors	① Gap sensor ② Cover opening sensor ③ Black mark sensor ④ Paper output sensor

Fonts/Graphics/Symbologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.
1D barcode	Code 39, Code 93, Code 128UCC, Code 128, subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11
2D barcode	PDF-417, Maxicode, DataMatrix, QR code, Aztec
Rotation	0°, 90°, 180°, 270°
Emulaion	TSPL, EPL, ZPL, DPL

Physical Features	
Dimension	220 × 187 × 96 mm(D×W×H)
Weight	3.01 kg

Power supply	
Input	AC 100-240V, 1.5A, 50-60Hz
Output	DC 24V/2.5A

Options	
Factory Options	① WiFi module ② Bluetooth module ③ Serial module
Dealer Options	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder

Environmental Conditions	
Operation	5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing
Storage environment	-40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

