


XP-T261B/T261E

Thermal Transfer/ Direct Thermal

Xprinter®

XP-T261B/T261E

Thermal Transfer/ Direct Thermal



- Preferred 2-inch barcode
- Suitable for various scenarios



Model	XP-T261B	XP-T261E
Resolution	203 DPI	300 DPI
Print method	Thermal Transfer / Direct Thermal	Thermal Transfer / Direct Thermal
Print speed	203mm (8") / s	152mm (6") / s
Max.print width	56mm (2.2")	54mm (2.12")
Max.print length	1778mm (70")	889mm (35")

Media		
Media type	Continuous, gap, black mark, fan-fold and punched hole	
Media width	25.4~60mm (1.0"~2.3")	
Media thickness	0.06~0.254 mm (2.36~10mil)	
Media core diameter	25.4 ~ 38 mm (1" ~ 1.5")	
Label length	10 ~ 1778 mm(0.39" ~ 70")	10 ~ 889 mm(0.39" ~ 35")
Label roll capacity	127 mm (5") OD (External Diameter)	
Ribbon capacity	Max.110m	
Ribbon width	60 mm	
Peel off	On	

Performance Features	
Processor	32-bit CPU
Memory	8MB Flash Memory/ 8MB SDRAM/ Flash memory can be expanded Max.4GB
Interface	USB+Lan; Optional:Serial/WIFI/Bluetooth
Sensors	① Gap sensor ② Cover opening sensor ③ Black mark sensor ④ Ribbon sensor

Fonts/Graphics/Symbologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.
1D barcode	Code 437(English - US), Code 737 (Greek), Code 850 (Latin-1), Code 852 (Latin-2), Code 855 (Cyrillic), Code 857 (Turkish), Code 860 (Portuguese), Code 861 (Icelandic), Code 862 (Hebrew), Code 863 (French Canadian), Code 864 (Arabic), Code 865 (Nordic), Code 866 (Russian), Code 869 (Greek 2), Code 950 (Traditional Chinese), Code 936 (Simplified Chinese), Code 932 (Japanese), Code 949 (Korean), Code 1250 (Latin-2), Code 1251 (Cyrillic), Code 1252 (Latin-1), Code 1253 (Greek), Code 1254 (Turkish), Code 1255 (Hebrew), Code 1256 (Arabic), Code 1257 (Baltic), Code 1258 (Vietnam), ISO-8859-1: Latin-1 (Western European), ISO-8859-2: Latin-2 (Central European), ISO-8859-3: Latin-3 (South European), ISO-8859-4: Latin-4 (North European), ISO-8859-5: Cyrillic, ISO-8859-6: Arabic, ISO-8859-7: Greek, ISO-8859-7: Hebrew, ISO-8859-9: Turkish, ISO-8859-10: Nordic, ISO-8859-15: Latin-9, UTF-8

2D barcode	PDF-417, Maxicode, DataMatrix, QR code, Aztec
Rotation	0°, 90°, 180°, 270°
Emulation	TSPL, EPL, ZPL, DPL

Physical Features	
Dimension	245mm (D) x 170mm (W) x 145mm (H)
Weight	1.55 Kg

Reliability	
Print head life	30 km

Software	
Driver	Windows / Linux / Mac
SDK	Windows / iOS / Android


Power supply	
Input	AC 100-240V, 1.5A, 50-60Hz
Output	DC 24V/2.5A, 60W

Options	
Factory Options	① WiFi module ② Lan module ③ Bluetooth module ④ Serial module
Dealer Options	① External paper roll holder and 1" paper roll ② Cutter ③ Peeling machine

Environmental Conditions	
Operation	5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing
Storage environment	-40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing




- Support printing with multiple materials





- 127 mm (5") OD media capacity



- Ribbon capacity 110m, half-inch core ribbon roll



- 203mm/s printing speed

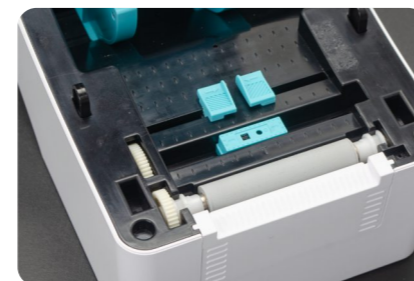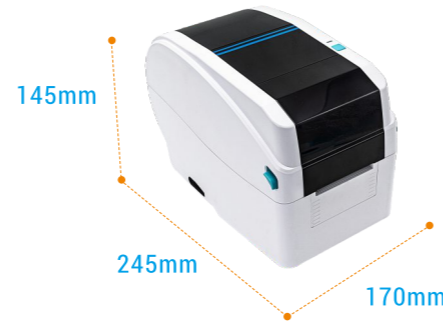

Scan QR code to checkout Xprinter website for more update information.
 Phone: (+86 756) 393 2978
 Http://www.xprintertech.com
 Email: overseas@xprinter.net

