

XP-G480E

Industrial Thermal Transfer Label Printer



XP-G480E

Industrial Thermal Transfer Label Printer



- Label printer for industrial machine
- Network interface, flexible operation, large capacity, visual window

Model	XP-G480E
Resolution	300 DPI
Print method	Thermal Transfer/Direct Thermal
Max.Print speed	152 mm (6") / s Max.
Max.print width	106mm (4.17")
Max.print length	889 mm (35")

Media	
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	20 ~ 120 mm (0.78" ~ 4.7")
Media thickness	0.06 ~ 0.254 mm (2.36 ~ 10 mil)
Label length	10 ~ 889 mm(0.39" ~ 35")
Media core diameter	203 mm (8")
Ribbon	127 mm (5") OD (outside wound)
Ribbon capacity	600 M
Ribbon width	110 mm

Performance Features	
Processor	32-bit CPU
Memory	128MB Flash Memory/ 128MB SDRAM/ Flash memory can be expanded Max.4Gb
Interface	USB / Serial / Lan Optional: Parallel/WIFI/TF card/Bluetooth
Sensors	① Gap sensor ② Cover opening sensor ③ Black mark sensor ④ Ribbon sensor

Fonts/Graphics/Symbologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.
1D barcode	Code 39, Code 93, Code 128UCC, Code 128, subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11
2D barcode	PDF-417, Maxicode, DataMatrix, QR code, Aztec
Rotation	0°、 90°、 180°、 270°
Emulation	TSPL、 EPL、 ZPL、 DPL

Physical Features	
Dimension	504 mm (D) x 257 mm (W) x 297 mm (H)
Weight	10.22 kg

Power supply	
Input	AC 100-240V, 50-60Hz
Output	DC 24V / 2.5A, 60W

Options	
Factory Options	①RS-232C (2400-115200 bps) communication interface; ②Ethernet server(10/100 Mbps); ③WiFi module ④Bluetooth module ⑤Paralled ⑥Peel ⑦Cutter
Dealer Options	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder

Environmental Conditions	
Operation	5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing
Storage environment	-40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing




203DPI
200 mm/s

300DPI
152 mm/s


- Visual operation interface



- Visual perspective window

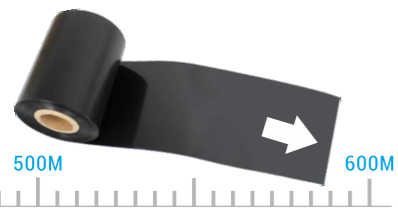

- Ribbon capacity 600M long



- 128MB Flash Memory/
128MB SDRAM



1. Plastic frame
2. Transparent cover design
3. Menu
4. Ribbon roller
5. Label roller
6. Print head



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 393 2978
Http://www.xprintertech.com
Email: overseas@xprinter.net

