




XP-Q303F

Linerless Label Printer

Xprinter®

XP-Q303F

Linerless Label Printer

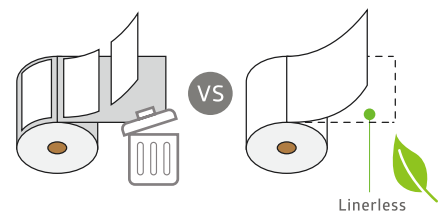

• Eco-friendly & Energy-saving

Linerless printing reduces material waste and disposal costs.



• Lower Cost, Higher Efficiency

Save on label materials and eliminate the need for liner removal—boosting productivity and reducing labor time.



• Ultra-durable Cutter Module

Silicone-lubricated for long-lasting smooth performance—200,000 cuts with no jamming or sticking.



• Diamond-grade Print Head

Diamond-coated surface with 10× hardness for exceptional durability and extended lifespan.



• Simplified Structure, Easy Maintenance

Tool-free, 3-second replacement with modular cutter and roller design—fast and effortless upkeep.



• Dual-purpose Printer

This printer serves as both a linerless printer and a receipt printer, offering dual functionality for versatile use in different applications.



Printer mode	Linerless mode	Receipt mode
Resolution	203 DPI	
Printing method	Direct Thermal	
Max.print speed	152 mm/s	200 mm/s
Print width	35~80 mm	Default 72mm, Max 80mm
Media		
Media type	Linerless label	Continuous paper
Media width	35~80 mm	80 mm
Media thickness	0.12 ~ 0.2 mm	0.06 ~ 0.08 mm
Paper roll outer warp	100 mm	
Supply method	Easy Paper Loading	
Performance Features		
RAM	4 M	
Flash	4 M	
Interfaces	USB+LAN, USB+LAN+Serial(Optional: Bluetooth and Wi-Fi)	
Sensors	Print head temperature sensor/ Paper end / Cover open	
Fonts/Graphics/Symbologies		
Character sizes	FONT 1 to FONT 8 , K, TST24.BF2, TSS24.BF2	Font A: 12×24 dots, Font B: 9×17 dots Chinese: 24×24 dots
1D barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/ CODE128	
2D bar code	QR code, PDF 417, Datamatrix	QR code
Emulaion	TSPL	ESC/POS
Physical Features		
Dimension	187mm×136mm×132mm(D×W×H)	
Weight	1.39 kg	
Reliability		
Cutter	1.5 million cuts	
Print head life	150 km	
Software		
Driver	Windows, Linux, macOS, Android, ChromeOS	
SDK	iOS, Android, Windows	
Power supply		
Power adapter	AC 100-240V/50~60Hz, 2.5A	
Printer Input	DC 24V/2.5A	
Cash drawer output	DC 24V/1A	
Environmental Conditions		
Operation	5~45 °C, Humidity: 10 ~ 80% RH	
Storage environment	-10 ~ 60 °C, Humidity: 10-90% RH	



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 393 2978
Http://www.xprintertech.com
Email: overseas@xprinter.net

