


Xprinter®

Cloud Printing

PC, Ipad, Mobile

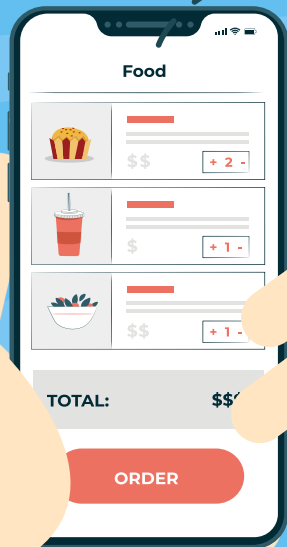

GPRS



WIFI



XP-T503

Thermal Receipt Printer

- High speed, long lifetime, high quality
- Outstanding functions, Strong stability
- Support Linux & Windows system
- Support Chinese Gb18030
- Compatible with ESC/POS commands

APPLICATIONS



Shopping



Mart



Hospital



Coffee Shop



Restaurant



Ticketing



Express




Factory

XP-T503

Direct thermal Printer



EASY LOAD



COMPACT
DESIGN



PAPER WIDTH

Model	XP-T503
Printing method	Direct thermal
Paper width	57.5±0.5mm
Paper thickness	0.06~0.08mm
Print width	48 mm
Column capacity	384 dots/line
Printing speed	90 mm/s
Interface	USB+WiFi, USB+4G, (Optional:WiFi+4G, Bluetooth)
Line spacing	3.75mm (Adjustable by commands)
Fonts Symbology	
Character size	Afont A:1.5×3.0mm, Font B: 1.1×2.1mm, CHN: 3.0*3.0mm
1D Barcode	UPC-A/UPC-E/JAN13(EAN13) /JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/ CODE128/QRCODE
Code page	PC347(Standard Europe) / Katakana / PC850(Multilingual) /PC860(Portuguese) / PC863(Canadian-French)/PC865(Nordic)/ West Europe/Greek/Hebrew/East Europe/Iran/WPC1252/PC866(Cyrillic#2)/PC852(Latin2)/PC858/IranII/ Latvian / Arabic / PT151(1251)
Input buffer	12 Kbytes
NV Flash	64 Kbytes
Power	
Power adaptor	AC 110V/220V, 50 ~ 60Hz, 1.0A
Power source	DC 9V / 2A
Physical characteristics	
Weight	0.57 kg
Dimensions	161×130×93mm (D×W×H)
Environmental Requirements	
Work environment	Temperature (0 ~ 45℃), humidity(10 ~ 80%)
Storage environment	Temperature(-10 ~ 60℃), humidity(10 ~ 90%)
Reliability	
Printer head life	50 KM
Software	
Emulation	ESC/POS
SDK	Windows / Android / iOS
Driver	Windows / Linux / Android



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 393 2978
Http://www.xprintertech.com
Email: overseas@xprinter.net

