



XP-Q303F

Linerless Label Printer


Xprinter®

XP-Q303F

Linerless Label Printer

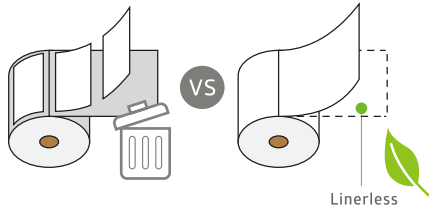

- **Eco-friendly & Energy-saving**
Linerless printing reduces material waste and disposal costs.

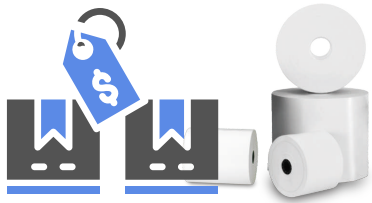


- **Lower Cost, Higher Efficiency**
Save on label materials and eliminate the need for liner removal—boosting productivity and reducing labor time.



- **Ultra-durable Cutter Module**
Silicone-lubricated for long-lasting smooth performance—20,000 cuts with no jamming or sticking.



- **Diamond-grade Print Head**
Diamond-coated surface with 10× hardness for exceptional durability and extended lifespan.




- **Simplified Structure, Easy Maintenance**
Tool-free, 3-second replacement with modular cutter and roller design—fast and effortless upkeep.



- **Dual-purpose Printer**
This printer serves as both a linerless printer and a receipt printer, offering dual functionality for versatile use in different applications.



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 393 2978
[Http://www.xprintertech.com](http://www.xprintertech.com)
Email: overseas@xprinter.net

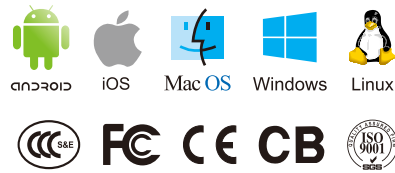

Printer mode		Linerless mode		Receipt mode	
Resolution		203 DPI			
Printing method		Direct Thermal			
Max.print speed		152 mm/s		200 mm/s	
Print width		80 mm		Default 72mm, Max 80mm	
Media					
Media type		Linerless label		Continuous paper	
Media width		35~80 mm		80 mm	
Media thickness		0.12 ~ 0.2 mm		0.06 ~ 0.08 mm	
Paper roll outer warp		100 mm			
Supply method		Easy Paper Loading			
Performance Features					
RAM		4 M			
Flash		4 M			
Interfaces		USB+LAN, USB+LAN+Serial(Optional: Bluetooth and Wi-Fi)			
Sensors		Print head temperature sensor/ Paper end / Cover open			
Fonts/Graphics/Symbologies					
Character sizes		FONT 1 to FONT 8 , K, TST24.BF2, TSS24.BF2		Font A: 12×24 dots, Font B: 9×17 dots Chinese: 24×24 dots	
1D barcode		UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/ CODE128			
2D bar code		QR code		QR code	
Emulaion		TSPL		ESC/POS	
Physical Features					
Dimension		187mm×136mm×132mm(D×W×H)			
Weight		1.39 kg			
Reliability					
Cutter		1.5 million cuts			
Print head life		150 km			
Software					
Driver		Windows, Linux, macOS, Android, ChromeOS			
SDK		iOS, Android, Windows			
Power supply					
Power adapter		AC 100-240V/50~60Hz, 2.5A			
Printer Input		DC 24V/2.5A			
Cash drawer output		DC 24V/1A			
Environmental Conditions					
Operation		5~45 °C, Humidity: 10 ~ 80% RH			
Storage environment		-10 ~ 60 °C, Humidity: 10-90% RH			