

# Xprinter®


## XP-E300H

### Thermal Receipt Printer



# XP-E300H

Thermal Receipt Printer




<b>Model</b>	XP-E300H
<b>Printing method</b>	Direct thermal
<b>Paper width</b>	79.5±0.5mm
<b>Print width</b>	72mm / 76mm / 80mm / 64mm / 48mm / 52mm
<b>Column capacity</b>	576 dots/line(adjustable by command)
<b>Max. print speed</b>	300 mm/s
<b>Interface</b>	USB+Serial+Lan (Optional: Bluetooth/WiFi)
<b>Line spacing</b>	3.75mm(Adjustable by commands)
<b>Column number</b>	80mm paper: Font A - 42 columns or 48 columns/Font B - 56 columns or 64 columns/ Chinese, traditional Chinese - 21 columns or 24 columns
<b>Character size</b>	ANK, Font A: 1.5×3.0mm(12×24 dots) Font B: 1.1×2.1mm(9×17 dots) Chinese, traditional Chinese:3.0×3.0mm(24×24 dots)
<b>Cutter</b>	
<b>Auto cutter</b>	Partial
<b>Barcode Character</b>	
<b>Extension character sheet</b>	PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 / IranII / Latvian / Arabic / PT151(1251)
<b>Barcode types</b>	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
<b>2D Barcode</b>	QR CODE / PDF417
<b>Input buffer</b>	2048 Kbytes
<b>NV Flash</b>	256 Kbytes
<b>Power</b>	
<b>Power adaptor</b>	Input: AC 220V, 50 ~ 60Hz Output: DC 24V/2.5A
<b>Printer input</b>	DC 24V/2.5A
<b>Cash drawer output</b>	DC 24V/1A
<b>Physical characteristics</b>	
<b>Weight</b>	1.65 Kg
<b>Dimensions</b>	188×145×148mm ( D×W×H)
<b>Environmental Requirements</b>	
<b>Work environment</b>	Temperature (0 ~ 45°C) humidity(10 ~ 80%)
<b>Storage environment</b>	Temperature(-10 ~ 60°C) humidity(10 ~ 80%)
<b>Reliability</b>	
<b>Cutter life</b>	1.5 million cuts
<b>Printer head life</b>	150 KM
<b>Software</b>	
<b>Emulation</b>	ESC/POS
<b>Driver</b>	Windows/JPOS/OPOS/Linux/Android/Mac
<b>Utility</b>	Windows & Linux test Utility
<b>SDK</b>	iOS/ Android/ Windows

### Key features

- Print speeds up to 300mm/s.
- Easy Maintenance: Takes 5S to update firmware only;
- User can search and manage Lan Printer directly by software;
- Steady performance: Resume from cutter jam error automatically;
- Excellent compatibility performance on different operating system;
- Energy control system to prevent printhead from overheating;
- Highly flexible for custom project;
- Hardware DIP switch available for easy setting.

### Applications

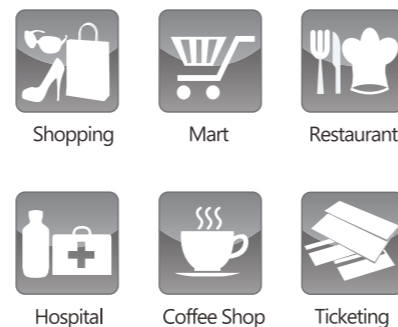

Scan QR code to checkout Xprinter website for more update information.  
Phone: (+86 756) 393 2978  
Http://www.xprintertech.com  
Email: overseas@xprinter.net

