


XP-Q80K

Thermal Receipt Printer

Xprinter®

XP-Q80K

Thermal Receipt Printer



Kitchen preferred printer




- 58mm/80mm paper width available (Optional: U+S+L)




- Flash LED light and big beeper voice



- Support queuing function



- Waterproof and dustproof

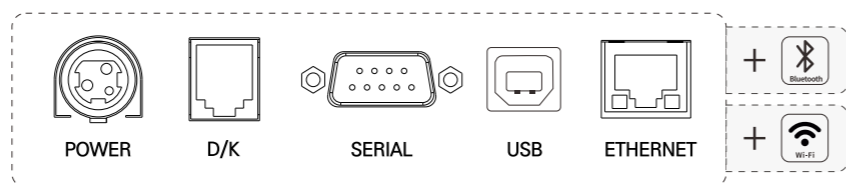

- USB+Serial+Lan(Optional: Bluetooth / WiFi)



Model	XP-Q80K	
Printing method	Direct thermal	
Media width	79.5±0.5mm / φ 80 mm	
Print width	72mm	
Column capacity	576 dots/line or 512 dots/line	
Max. Print speed	230 mm/s	260 mm/s
Interface	USB / USB+Serial / USB+Lan / (Optional: Bluetooth/Wifi)	USB+Serial+Lan (Optional: Bluetooth/Wifi)
Line spacing	3.75mm (Adjustable by commands)	
Character size	ANK, Font A: 1.5×3.0mm(12×24 dots) Font B: 1.1×2.1mm(9×17 dots) Simplified/Traditional Chinese:3.0×3.0mm(24×24 dots)	
Barcode Character		
Extension character sheet	PC437(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portugal) / PC863(Canadian) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / PC858 / IranII / Latvian / Arabic / PT151(1251)	
1D Barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128	
2D Barcode	QR CODE / PDF417	
Input buffer	96 Kbytes: USB / USB+Serial 256 Kbytes: USB+Lan	256 Kbytes
NV Flash	256 Kbytes	
Power		
Power adaptor	Input: AC 100~240V, 50 ~ 60Hz, Output: DC 24V/2.5A	
Printer Input	DC 24V/2.5A	
Cash drawer	DC 24V/1A	
Physical characteristics		
Weight	0.89 Kg	
Dimensions	168*130*123.5mm(D*W*H)	
Environmental Requirements		
Work environment	Temperature (0 ~ 45°C) humidity(10 ~ 80%)	
Storage environment	Temperature(-10 ~ 60°C) humidity(10 ~ 90%)	
Reliability		
Auto cutter	Partial	
Cutter life	1.5 million cuts	
Printer head life	150 KM	
Software		
Emulation	ESC/POS	
Driver	Windows / Linux / Mac OS / Android	



Scan QR code to checkout Xprinter website for more update information.
 Phone: (+86 756) 3932978
 Http://www.xprintertech.com
 Email: overseas@xprinter.net

