


# TP6-S

Mobile Receipt Label Printer



# TP6-S

Mobile Receipt Label Printer




Model	TP6-S
Resolutions	300 DPI
Print method	Direct thermal
Max.Print width	48 mm
Max. print speed	10 mm/s
Media Type	Continuous thermal paper, gap thermal paper(≥8mm)
Paper roll diameter	30 mm
Media width	58 mm
Media thickness	60~150μm
Sensor	Paper detection sensor; Cover open sensor; Overheat detection
Dimensions	86*86*41 mm (D*W*H)
Weight	0.16 kg
Peeling mode	Manual tearing off
Printer head life	50 KM
Battery	3.7V / 1000mAh, Standby time: 21.7H; Full charge time:3.6H
Charge	5V / 1A
Interfaces	USB+Bluetooth
Memory	16 KB
Flash	128 KB
Operations	1 button, 1 indicator light
Environment	Temperature 5 ~ 40°C, humidity(25 ~ 85%) Temperature -40 ~ 60°C, humidity(10 ~ 90%)
Certification	FCC, CE, CB, CCC
Accessories	USB cable, Manual



- Support both **label printing** and **receipt printing**



- **Compact and Portable Design**

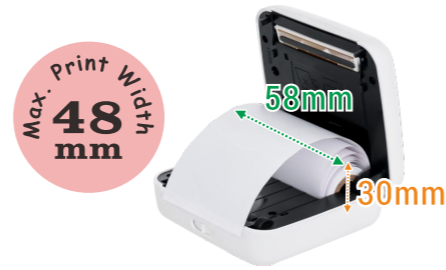

- 300 DPI, print speed **10mm/s**



- **Inkless Thermal Printing**



- **Long-lasting Endurance**



- **Powerful Multi-Function Application**

## Applications

