
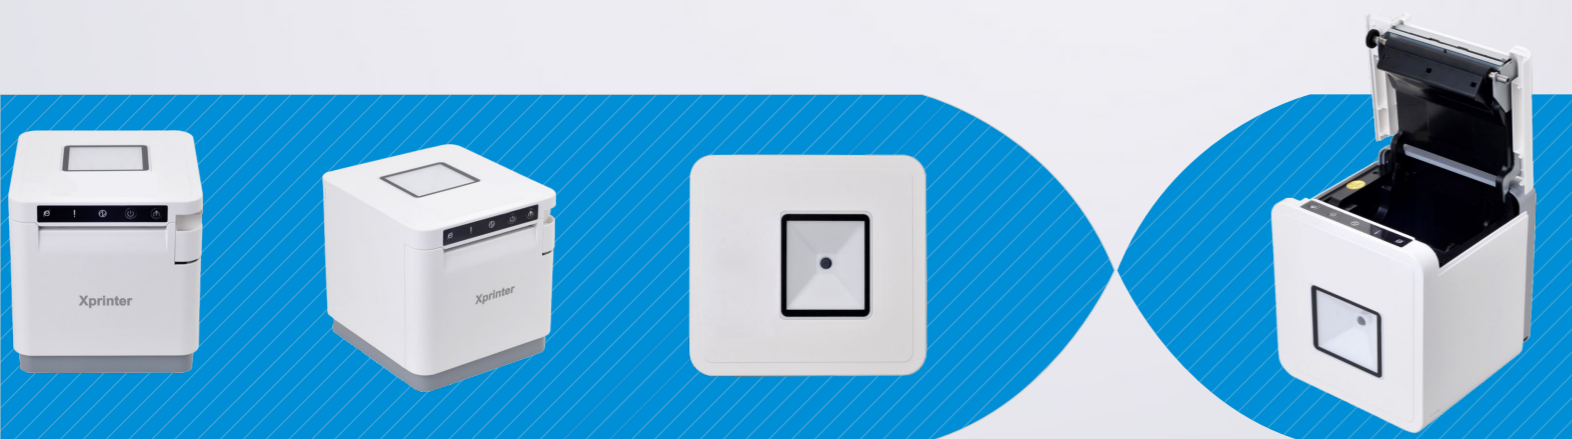


XP-R1

Thermal Receipt Scanner Printer

- Support 58mm, 80mm, and 83mm printing paper
- Supports 83mm paper roll width.
- Printhead life upgrade to 150km.
- Support page mode; Queuing function, reprinting function; No lost order function; QR code scanning function
- Steady performance: Apply auto cutter error calibration and printhead overheat protection system.
- Excellent compatibility, rich software on Windows, Linux, Mac, Android, and IOS operating system.

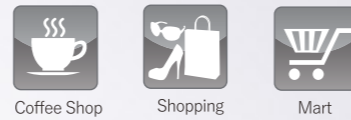

XP-R1

Thermal Receipt Scanner Printer



Printing

Printing method	Direct thermal
Paper width	58 / 80 / 83±0.5mm
Print width	48~80±0.5mm
Paper roll diameter	83mm
Column capacity	576 dots/line
Max. print speed	230 mm/s
Interface	USB+Bluetooth+Scanner, USB+Scanner,
Line spacing	3.75mm(Adjustable by commands)
Character size	ANK, Font A: 1.5×3.0mm(12×24 dots) Font B: 1.1×2.1mm(9×17 dots) Chinese, traditional Chinese:3.0×3.0mm(24×24 dots)

Cutter

Auto cutter	Partial
-------------	---------

Barcode Character

Extension character sheet	PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 / IranII / Latvian / Arabic / PT151(1251)
Barcode types	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
2D Barcode	QR CODE / PDF417
Input buffer	144 KB
NV Flash	256 KB

Power

Power adaptor	Input: AC 100~240V, 50 ~ 60Hz
Power source	Output: DC 24V/2.5A
Cash drawer output	DC 24V/1A

Physical characteristics

Weight	1.02 Kg
Dimensions	140*130*133mm(D*W*H)

Environmental Requirements

Work environment	Temperature (0 ~ 45°C), humidity(10 ~ 80%)
Storage environment	Temperature(-10 ~ 60°C), humidity(10 ~ 90%)

Reliability

Cutter life	2 million cuts
Printer head life	150Km

Software

Emulation	ESC/POS
Driver	Windows / Linux / Android / Mac
Utility	Windows & Linux test Utility
SDK	iOS, Android, Windows



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 393 2978
Http://www.xprintertech.com
Email: overseas@xprinter.net

